

EXPLOSION-PROOF UNIT HEATER SUBMITTAL

Page 1 of 7





Class I, Divisions 1 & 2, Groups C & D
Class II, Divisions 1 & 2, Groups E, F & G
Class I, Zones 1 & 2, Groups IIB
Ignition Temperature Code T3C, 320°F (160°C)

Unit Heater Listing 60 Hz

ĸw	Volts	Phase	Total Amps (1)	Frame Size	Approximate Air Temperature Rise °F (°C)	Catalog Number	
	208	1	17	1	15 (8)	HX-233-FA-0036C	
	240	1	15	1	15 (8)	HX-233-FA-0036J	
2	208	3	10	1	15 (8)	HX-233-FA-0036D	
3	240	3	9	1	15 (8)	HX-233-FA-0036K	
	480	3	5	1	15 (8)	HX-233-FA-0036U	
	600	3	4	1	15 (8)	HX-233-FA-0036Z	
	208	1	26	1	25 (13)	HX-233-FA-0056C	
	240	1	23	1	25 (13)	HX-233-FA-0056J	
-	208	3	16	1	25 (13)	HX-233-FA-0056D	
5	240	3	14	1	25 (13)	HX-233-FA-0056K	
	480	3	7	1	25 (13)	HX-233-FA-0056U	
	600	3	6	1	25 (13)	HX-233-FA-0056Z	
	208	1	38	1	28 (16)	HX-233-FA-0086C	
	240	1	34	1	28 (16)	HX-233-FA-0086J	
7.5	208	3	23	1	28 (16)	HX-233-FA-0086D	
7.5	240	3	20	1	28 (16)	HX-233-FA-0086K	
	480	3	10	1	28 (16)	HX-233-FA-0086U	
	600	3	9	1	28 (16)	HX-233-FA-0086Z	
	240	1	44	1	38 (21)	HX-233-FA-0106J	
	208	3	30	1	38 (21)	HX-233-FA-0106D	
10	240	3	26	1	38 (21)	HX-233-FA-0106K	
	480	3	13	1	38 (21)	HX-233-FA-0106U	
	600	3	11	1	38 (21)	HX-233-FA-0106Z	
	208	3	44	2	27 (15)	HX-233-FB-0156D	
45	240	3	38	2	27 (15)	HX-233-FB-0156K	
15	480	3	19	2	27 (15)	HX-233-FB-0156U	
	600	3	16	2	27 (15)	HX-233-FB-0156Z	
20	480	3	25	2	35 (19)	HX-233-FB-0206U	
20	600	3	21	2	35 (19)	HX-233-FB-0206Z	
25	480	3	31	3	26 (14)	HX-233-FC-0256U	
25	600	3	25	3	26 (14)	HX-233-FC-0256Z	
20	480	3	37	3	25 (13)	HX-233-FC-0306U	
30	600	3	30	3	25 (13)	HX-233-FC-0306Z	
35	480	3	43	3	29 (16)	HX-233-FC-0356U	
	600	3	35	3	29 (16)	HX-233-FC-0356Z	

⁽¹⁾ Total Amps = Heating element amps and motor amps.



EXPLOSION-PROOF UNIT HEATER SUBMITTAL

Page 2 of 7

Class I, Divisions 1 and 2, Groups C and D
Class II, Divisions 1 and 2, Groups E, F and G
Class I, Zones 1 and 2, Group IIB

Unit Heater Listing 50 Hz

Temperature Code T3C, 320°F (160°C)

KW	Volts	Phase	Total Amps (1)	Frame Size	Approximate Air Temperature Rise °F (°C)	Catalog Number	
	220	1	14	1	14 (8)	HX-233-FA-0036E	
	220	3	9	1	14 (8)	HX-233-FA-0036F	
2.5	380	3	6	1	14 (8)	HX-233-FA-0036G	
	400	3	6	1	14 (8)	HX-233-FA-0036H	
	414	3	5	1	14 (8)	HX-233-FA-0036I	
	220	1	21	1	24 (13)	HX-233-FA-0056E	
	220	3	13	1	24 (13)	HX-233-FA-0056F	
4.2	380	3	9	1	24 (13)	HX-233-FA-0056G	
	400	3	8	1	24 (13)	HX-233-FA-0056H	
	415	3	7	1	24 (13)	HX-233-FA-0056I	
	220	1	31	1	28 (16)	HX-233-FA-0076E	
	220	3	19	1	28 (16)	HX-233-FA-0076F	
6.3	380	3	12	1	28 (16)	HX-233-FA-0076G	
	400	3	11	1	28 (16)	HX-233-FA-0076H	
	415	3	10	1	28 (16)	HX-233-FA-0076I	
	220	1	40	1	38 (21)	HX-233-FA-0096E	
	220	3	24	1	38 (21)	HX-233-FA-0096F	
8.4	380	3	15	1	38 (21)	HX-233-FA-0096G	
	400	3	13	1	38 (21)	HX-233-FA-0096H	
	415	3	13	1	38 (21)	HX-233-FA-0096I	
	220	3	35	2	26 (14)	HX-233-FB-0136F	
12.5	380	3	21	2	26 (14)	HX-233-FB-0136G	
12.5	400	3	19	2	26 (14)	HX-233-FB-0136H	
	415	3	18	2	26 (14)	HX-233-FB-0136I	
	220	3	46	2	35 (19)	HX-233-FB-0176F	
16.7	380	3	28	2	35 (19)	HX-233-FB-0176G	
10.7	400	3	25	2	35 (19)	HX-233-FB-0176H	
	415	3	24	2	35 (19)	HX-233-FB-0176I	
	380	3	33	3	26 (14)	HX-233-FC-0216G	
21	400	3	32	3	26 (14)	HX-233-FC-0216H	
	415	3	31	3	26 (14)	HX-233-FC-0216I	
	380	3	39	3	30 (17)	HX-233-FC-0256G	
25	400	3	37	3	30 (17)	HX-233-FC-0256H	
	415	3	36	3	30 (17)	HX-233-FC-0256I	

⁽¹⁾ Total Amps = Heating element amps and motor amps.



EXPLOSION-PROOF UNIT HEATER SUBMITTAL

Page 3 of 7


Factory Built-in Options


Code	Option	Description	
C1	316 Stainless Steel Corrosion Resistant Construction (Waste Water Treatment Plants)	316 Stainless steel heat exchanger with aluminum fins; 316 stainless steel cabinet; aluminum fan blade; cast aluminum NEMA 4X, 7, 9 control enclosure; corrosion resistant hardware. Frame Size 1 2 3	
C2	Dirty Duty Corrosion- Resistant Construction (Chemical Plants)	Epoxy-coated motor; Heresite® coated heat exchanger, cabinet and fan blade; cast aluminum NEMA 4X, 7, 9 control enclosure; corrosion resistant hardware. Frame Size 1 2 3	
D	Disconnect Switch	Factory installed on the unit heater above the control enclosure. This in an inexpensive and positive way to meet NEC/CEC requirements for a disconnecting means within sight of the heater. Max Total Motor/Heater Amps Max 15 Amps, up to 480V, 1 & 3 Phase Max 60 Amps, up to 600V, 1 & 3 Phase	
E	Group E (Metal Dust) Construction	Class II, Group E (Metal Dust) Construction Temperature Code T3C, 320°F (160°C).	
К	"Warning" Pilot Light	Indicates when the thermal cutouts have tripped and the unit heater needs servicing.	
L	"Heater On" Pilot Light	Indicates when the electric heating elements are energized.	
М	Manual Reset Thermal Cutout with Backup Contactor	A pilot duty manual reset thermal cutout with a backup contactor is provided for independent secondary over temperature protection. This option cannot be provided if option Code S or V are also specified.	
S	Built-In Auto/Fan Selector Switch	A two-position switch wired to the control circuit for auto (automatic heat) and fan only control. This selector switch cannot be provided if option Code M or V are also specified.	
S1	Built-In Controls for Remote Auto/Fan Selector Switch	Unit is prewired for field addition of remote auto/fan selector switch. This option cannot be provided if Code M or V are also specified.	
T	Adjustable Thermostat	Factory installed and prewired to the control enclosure. Thermostat is adjustable from 50 to 90°F (10 to 32°C) range.	
T1	Adjustable Thermostat for Wet Location	Factory installed and prewired to the control enclosure. Thermostat is adjustable from 40 to 80°F (5 to 25°C) range.	
٧	120 Volt Control Circuit, Fused Secondary and Grounded	This can be provided when required for special external thermostat circuit. This option cannot be provided if option Code S or M are also specified. Nor can both K and L be specified.	
W	Wet Location Construction Features – IP55	Unit provided with components suitable for IP55 wet locations.	



EXPLOSION-PROOF UNIT HEATER SUBMITTAL

Page 4 of 7

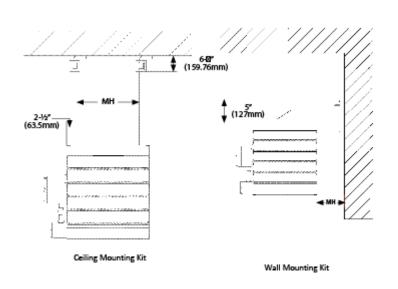

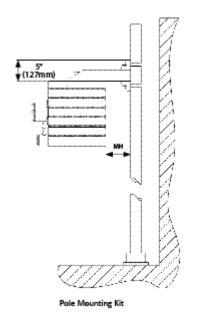

Size	MH In. (mm)	MW In. (mm)	\boxtimes
1	11.063 (281)	9 (228.6)	
2	15.063 (382.6)	7 (177.8)	
3	19.063 (484.2)	5 (127)	

Mounting Kits for Sizes 1, 2 & 3

Туре	Standard Painted Steel	\boxtimes	Stainless Steel Option Codes C1 & C2	\boxtimes
Ceiling Mount	HX-1022451		1022451-S	
Wall Mount	HX-1022454		1022454-S	
Pole Mount	HX-1022457		1022457-S	

Wall Mounted Accessories

(Class I, Groups C & D; Class II, Groups E, F & G)

(Class I, GIO	(class i, droups c & b, class ii, droups c, i & d)					
Catalog	Description	\boxtimes				
Number	Bescription					
1007002	Thermostat: 50 – 90°F (10 – 32°C) range.					
1007002	Indoor Type 1					
1030790	Thermostat: 40 – 80°F (5 – 25°C) range.					
1030730	IP55, Type 4					
1001744	Auto/fan selector: Type 1					
1031042	Auto/fan selector: Type 4					



EXPLOSION-PROOF UNIT HEATER SUBMITTAL

Page 5 of 7

Dimensions, Airflows and Weights


Difficionally / Millions and Weights						
Fram	e Size	Size 1	Size 2	Size 3		
Overall	'X' In. (mm)	22.50 (571.50)	22.50 (571.50)	22.75 (577.85)		
Heater	'Y' In. (mm)	19.375 (492.125)	23.375 (593.725)	27.375 (695.325)		
Dimensions	'Z" In. (mm)	16.063 (408)	20.188 (512.775)	24.188 (614.375)		
\Maight	Net Lbs (kgs)	110 (49.89)	150 (68.03)	190 (86.18)		
Weight	Shipping Lbs (kgs)	130 (58.96)	169 (76.65)	216 (97.97)		

60 Hertz Heaters

KW Range		3-5	7.5-10	15	20	25	30-35
Airflow	Airflow Volume CFM	650	850	1800		3110	3850
	(cubic meter/hr.)	(1104)	(1444)	(3058)		(5283)	(6541)
Characteristics	Air Throw Feet (m)	15 (4.5)	25 (7.6)	45 (13.7)		65 (19.8)	75 (22.8)
	RPM	1725					
Motor/Fan	HP	1/4		1/2			
	Fan Blade Dia. In. (mm)	12 (304.8) 16 (406.4)			20	(508)	

50 Hertz Heaters

ŀ	KW Range	2.5-4.2	6.3-8.4	12.5	16.7	21-25
Airflow	Airflow Volume CFM		700	15	00	2600
Characteristics	(cubic meter/hr.)	(934)	(1189)	(25	49)	(4417)
Characteristics	Air Throw Feet (m)	13 (4)	22 (7)	39 (12)		57 (17)
	RPM	1438				
Motor/Fan	НР	1/4				1/2
	Fan Blade Dia. In. (mm)	12 (304.8) 16 (406.4)		06.4)	20 (508)	

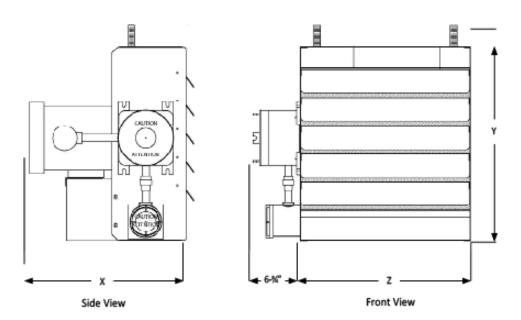



EXPLOSION-PROOF UNIT HEATER SUBMITTAL

Page 6 of 7

Sample Specification

A specification can be prepared by using the following information. A check box has been supplied so that you may mark those selections which you require. Material which is part of the standard 233 Explosion-Proof Unit Heater specification has already been checked.

	Electric explosion-proof unit heaters shall be HEATREX 233 SERIES, of the KW rating, and phase specified in the schedule. They shall be forced fan type, cCSAus Approved for:
	☐ Class I, Divisions 1 and 2, Groups C & D; Class II, Divisions 1 and 2, Groups F & G Class I, Zone 1 and 2, Group IIB
	Ignition Temperature Code No. T3C, 320°F (160°C) (Standard construction)
	☐ Class II, Divisions 1 and 2, Group E, is described to the following text Ignition Temperature Code No. T3C, 320°F (160°C) (Group E, Metal Dust)
	Unit heaters shall have an automatic and a manual reset thermal cutouts for overtemperature protection, controlling magnetic contactor and 24 volt control circuit transformer housed in a NEMA 7, 9 cast aluminum enclosure.
⊠ 3.	The heat exchanger shall be liquid-to-air design, utilizing an all welded steel headers and tube construction with spiral wound aluminum fins. Nontoxic, inhibited, propylene glycol heat transfer fluid shall be used that provides freeze protection down to -49°F (-45°C). Pressure relief valve setting to be 70 psig. The heat exchanger shall include industrial grade HEATREX electric heating elements.
4 .	Cabinet shall be provided with adjustable outlet louvers having minimum opening safety stops.
	Fan motor shall include permanently lubricated ball bearings and built-in thermal overload protection. Motor to operate at line voltage and be prewired to the control enclosure to eliminate the need for separate field wiring to the motor.
	The heater shall be provided with an HEATREX accessory mounting kit designed to bear the weight of the heater assembly (check one):
	☐ Ceiling mounting kit ☐ Wall mounting kit ☐ Pole mounting kit
☐ 7.	Construction Type (check one):
	Standard Construction utilizing an all welded heat exchanger consisting of painted steel headers and with spiral wound aluminum fins; industrial grade, corrosion-resistant cabinet fabricated from powder coated 14 gauge steel, epoxy-coated motor; aluminum fan blade; NEMA 7, 9 cast aluminum enclosure.
	Dirty Duty Corrosion-Resistant Construction (Chemical Plants) with epoxy-coated motor; Heresite® coated heat exchanger, cabinet and fan blade; NEMA 4X, 7, 9 terminal box.
	☐ 316 Stainless Steel Corrosion-Resistant Construction (Waste Water Treatment Plants) with 316 stainless steel heat exchanger with aluminum fins, 316 stainless steel cabinet; aluminum fan blade; cast aluminum NEMA 4X, 7, 9 terminal box; epoxy-coated motor; aluminum fittings; stainless steel conduit and hardware.
□ 8.	Wet Location Construction:
	Wet location requirements – IP55 motor rating and Type 4 enclosures. Requires selecting either Dirty Duty or 316 Stainless Corrosion-Resistant Construction.
9.	The following factory installed and prewired control options are to be supplied:
	☐ Thermostat: 50-90°F (10-32°C); Indoor, Type 1
	☐ Thermostat: 40-80°F (5-25°C) IP55, Type 4 (can be specified for all constructions).
	Disconnect switch with external handle.
	Manual reset thermal cutout with backup contactor (cannot be provided if selector switchor 120 volt control circuit is also specified).



EXPLOSION-PROOF UNIT HEATER SUBMITTAL

Page 7 of 7

 Two-position auto/fan selector switch for fan only control (cannot be provided if manual reset cutout with backup contactor or 120 volt control circuit is also specified). Built-in Remote
 120 volt control circuit for special external thermostat circuit (cannot be provided if selector switch or manual reset thermal cutout with backup contactor, nor can both warning and heater on pilot lights be specified). "Heater On" pilot light to indicate when heating elements are energized. "Warning" pilot light to indicate when thermal cutouts have tripped and heater needs to be serviced. 50 Hertz for international requirements.
Accessory room controls shall be furnished with each heater for remote field mounting. Thermostat: 50-90°F (10-32°C); Indoor, Type 1; UL Listed and CSA Certified. Thermostat: 40-80°F (5-25°C) IP55, Type 4: cCSAus Certified. Remote Fan Switch: Auto/fan selector switch for fan only control; Type 1; UL Listed and CSA Certified. (Cannot be provided if manual rest cutout with backup contactor or 120 volt control circuit is also specified. Remote Fan Switch: Auto/fan selector switch for fan only control; Type 4; UL Listed and CSA Certified. (Cannot be provided if manual rest cutout with backup contactor or 120 volt control circuit is also specified.